


FALK Roof / Wall 1000 TR +

Profile

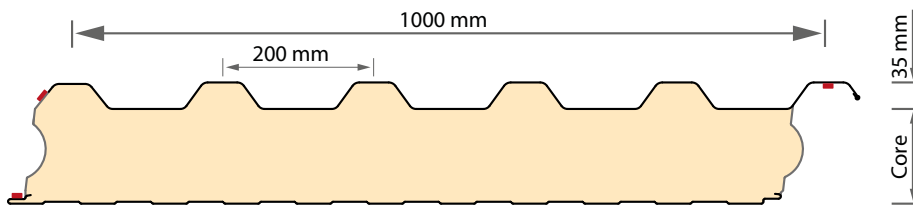

Features

Core thickness (mm)	Total height (mm)	U-value (W/m ² .K)	R-value (h.ft ² .°F/BTU. in)	Weight (kg/m ² **)
100 mm	135 mm	0.20	28.91	12.9
125 mm	160 mm	0.16	35.33	13.9
150 mm	185 mm	0.14	41.69	14.9

(**) based upon an external sheet thickness of 0.5 mm and internal sheet thickness of 0.4 mm.

Standard Configuration

Cover width:	1000 mm
C.t.c. crowns:	200 mm
Profile height:	35 mm
Core thickness:	100, 125 and 150 mm
Minimum roof slope:	4°
Core material:	Polyisocyanurate insulation
Endlap:	Available with or without endlap
Direction of lay:	Available left and right
Coatings:	External: HPS 200 Ultra* Internal: Polyester 20 mu
Colours:	According to our colour chart
Minimum length:	2500 mm (shorter on request)
Maximum length:	11938mm

(*) optional alternative steel thicknesses and coatings available.

