



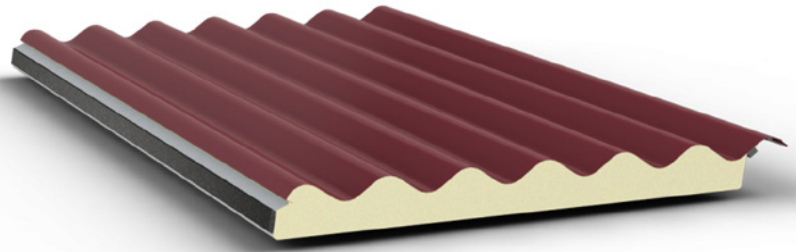

## FALK ROOF 1000-GL EKO

The FALK 1000 GL EKO panel is a robust roof panel with a high-quality PIR insulation core. The panel can be stacked both positive (standard) and interleaved. The panel is supplied with a seamed side lap and double sealing: both the inside and the outside. The inside is provided with a white aluminium foil, which is resistant to ammonia.




### PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft <sup>2</sup> .°F/BTU)	U-VALUE (SI)* [W/(m <sup>2</sup> .K)]
31 mm / 1.22 in	11.39	0.49
43 mm / 1.69 in	14.72	0.39
60 mm / 2.36 in	19.45	0.29

\*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1000 mm / 39.37 in
C.T.C CROWNS <sup>1</sup> :	167 mm / 6.57 in
PROFILE HEIGHT:	40 mm / 1.57 in
MINIMUM ROOF SLOPE:	1:12 or 4°
CORE MATERIAL:	Polyisocyanurate insulation
ENDLAP:	Available with or without endlap
GAUGE:	Exterior: 24, 26 ga Interior: 26 ga
DIRECTION OF LAY:	Available left or right
COATINGS:	External: Colorcoat Prisma or Colorcoat HPS200 ULTRA® Internal: Ammonia resistant foil
COLOURS:	According to our colour charts See: <a href="http://falkpanels.ca/charts">falkpanels.ca/charts</a>
MINIMUM LENGTH:	2500 mm / 8'-2", shorter lengths available on request
MAXIMUM LENGTH:	11938 mm / 39' - 2"

<sup>1</sup>C.T.C = Center to Center

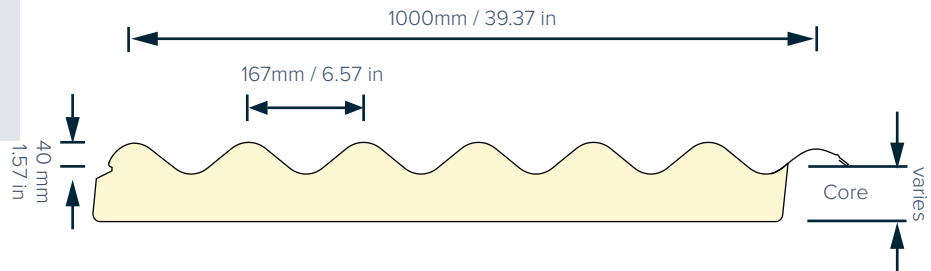

[WWW.FALKPANELS.CA](http://WWW.FALKPANELS.CA)