




FALK ROOF / WALL 1000-TR+

The FALK 1000 TR + is a robust panel with a high-insulating PIR foam core and hollow controlled joints. Due to the 5 crowns trapezoidal profile this product is suitable for large spans and has excellent insulation properties. This product is supplied with a double sealant, both at the inside and outside. Heat loss and condensation problems will be a thing of the past.

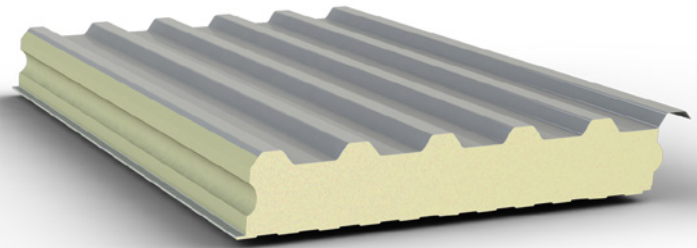


PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft ² .°F/BTU)	U-VALUE (SI)* [W/(m ² .K)]
100mm	30.66	0.19
125mm	37.70	0.16
150mm	44.73	0.13

*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1000 mm / 39.37 in
C.T.C CROWNS ¹ :	200 mm / 7.87 in
PROFILE HEIGHT:	35 mm / 1.38 in
MINIMUM ROOF SLOPE:	1:12 or 4°
CORE MATERIAL:	Polyisocyanurate insulation
ENDLAP:	Available with or without endlap
GAUGE:	Exterior: 24, 26 ga Interior: 26 ga
DIRECTION OF LAY:	Available left or right
COATINGS:	External: Colorcoat Prisma or Colorcoat HPS200 ULTRA® Internal: Polyester
COLOURS:	According to our colour charts See: falkpanels.ca/charts
MINIMUM LENGTH:	2500 mm / 8'-2", shorter lengths available on request
MAXIMUM LENGTH:	11938 mm / 39' - 2"

¹C.T.C = Center to Center

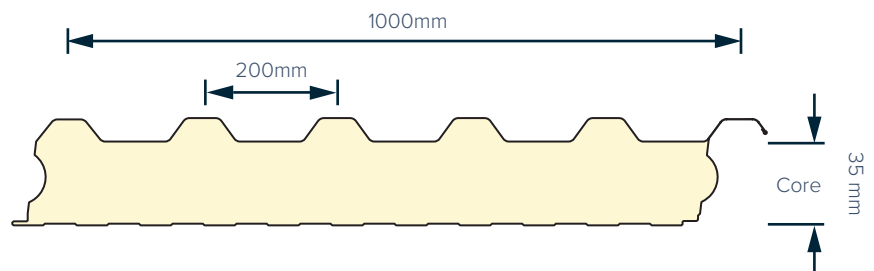

WWW.FALKPANELS.CA