



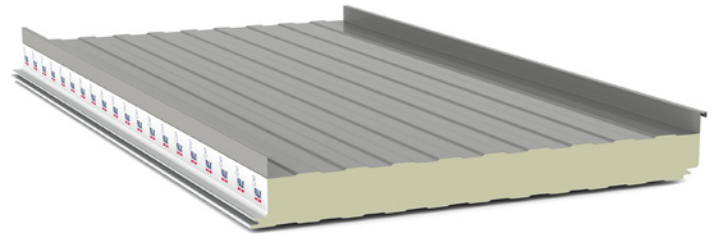

STANDING SEAM ROOF PANEL

SSR-42

The FALK SSR 42 standing seam roof panel is for roof pitches from 0.25:12. The roof panel is easy to assemble and is an alternative for traditional built up roofs. The FALK SSR 42 is available in standard FALK colors, along with a variety of other color options that are nonstandard.

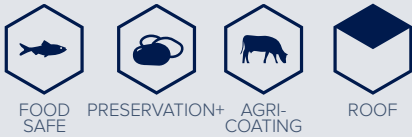


PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft ² .°F/BTU)	U-VALUE (SI)* [W/(m ² .K)]
76.2 mm / 3 in	21.54	0.264
101.6 mm / 4 in	28.72	0.198
127 mm / 5 in	35.90	0.158
152.4 mm / 6 in	43.08	0.132

*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1067 mm / 42 in
PROFILE HEIGHT:	48.0 mm / 1.89 in
MINIMUM ROOF SLOPE:	0.25:12
CORE MATERIAL:	Polyisocyanurate insulation
GAUGE:	Exterior: 24, 26 ga Interior: 26 ga
ENDLAP:	Available with or without endlap
DIRECTION OF LAY:	Available left or right
COATINGS:	Polyester 25 mu (other coatings on request)
COLOURS:	Colorcoat HPS200 ULTRA®
MINIMUM LENGTH:	2500 mm / 8' - 2"
MAXIMUM LENGTH:	24994 mm / 82' - 0" *special transportation arrangements for longer lengths as required.

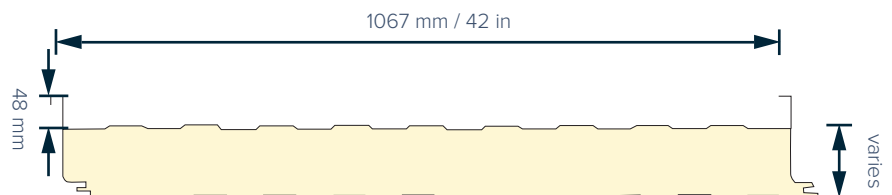

WWW.FALKPANELS.CA