





FALK RRP-40 RIBBED ROOF PANEL

Core Thickness [mm / in]	U-factor (IP)* [BTU/h·ft ² ·°F]	R-value** [h·ft ² ·°F/BTU]	U-value (SI)* W/(m ² ·K)
38.1 mm / 1.5 in	0.0929	10.77	0.527
50.8 mm / 2 in	0.0696	14.36	0.395
63.5 mm / 2.5 in	0.0557	17.95	0.316
76.2 mm / 3 in	0.0464	21.54	0.264
101.6 mm / 4 in	0.0348	28.72	0.198
127.0 mm / 5 in	0.0279	35.90	0.158
152.4 mm / 6 in	0.0232	43.08	0.132

* Tested at 4°C / 40°F Mean Temperature

** Catalog ratings are based on European test standards. Canadian test results will be published on our website as soon as they become available.

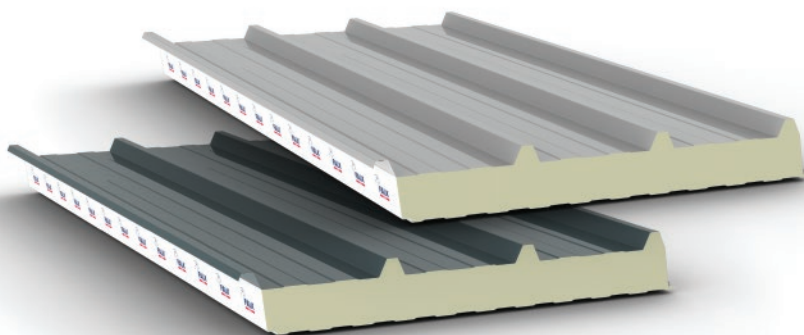

- Minimum roof slope 0.5:12 and greater
- Max. length up to 2500 mm / 82 feet*
- Colorcoat HPS200 Ultra® or Sherwin-Williams Fluoropon® 70% PVDF for exterior faces
- Rapid installation due to positive stacking
- Non-embossed available

*Requires special transportation arrangements

