



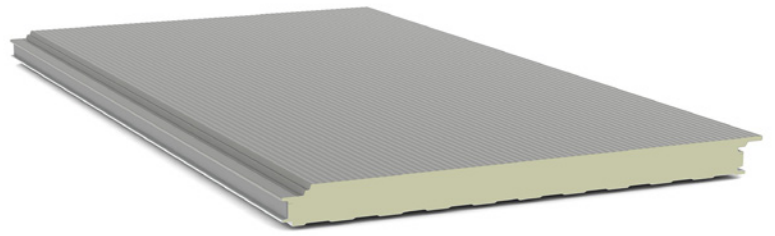

HIDDEN FIXED WALL PANEL HFW-40

The FALK HFW 40 with concealed fastening is our most popular panel. These insulated metal panels can be used as exterior siding or interior dividing walls. They consist of two profiled steel sheets with PIR insulation in between. The greatest advantage of the FALK HFW 40 is the concealed fastening allowing design and functionality to work perfectly together.

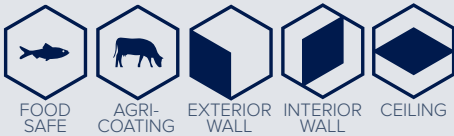

PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft ² .°F/BTU)	U-VALUE (SI)* [W/(m ² .K)]
63.5 mm / 2.5 in	17.95	0.316
76.2 mm / 3 in	21.54	0.264
101.6 mm / 4 in	28.72	0.198
127 mm / 5 in	35.90	0.158
152.4 mm / 6 in	43.08	0.132

*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1013 mm / 39.9 in
CORE MATERIAL:	Polyisocyanurate insulation
ORIENTATION:	Vertical or horizontal
COATINGS:	Colorcoat HPS200 Ultra® as desired for exterior and interior faces
GAUGE:	Exterior: 24, 26 ga Interior: 26 ga
PROFILING:	External: Macro, Micro or Box profile Internal: Box Profile
COLOURS:	According to our colour charts See: falkpanels.ca/charts
MINIMUM LENGTH:	2500 mm / 8' - 2"
MAXIMUM LENGTH:	24994 mm / 82'-0"*** ***special transportation arrangements for longer lengths as required.

