



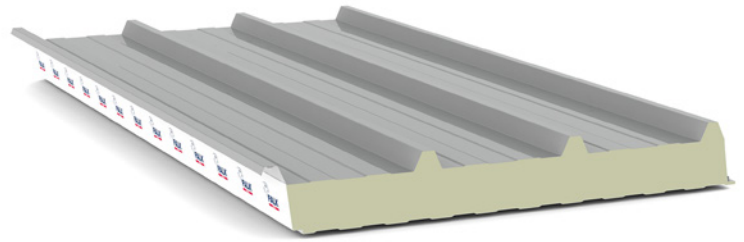

RIBBED ROOF PANEL

RRP-40

This insulated metal panel with three crown trapezoidal profiling is best when applied to roofs. The trapezoidal profile makes this roofing sheet a powerful insulated metal panel able to bridge large spaces. With a wide variety of colors, the FALK RRP 40 is a beautiful solution for your roof.



PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft ² .°F/BTU)	U-VALUE (SI)* [W/(m ² .K)]
38.1 mm / 1.5 in	10.77	0.527
50.8 mm / 2 in	14.36	0.395
63.5 mm / 2.5 in	17.95	0.316
76.2 mm / 3 in	21.54	0.264
101.6 mm / 4 in	28.72	0.198
127.0 mm / 5 in	35.90	0.158
152.4 mm / 6 in	43.08	0.132

*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1016 mm / 40 in.
C.T.C CROWNS ¹ :	338.7 mm / 13.3 in
GAUGE:	Exterior: 24, 26 ga Interior: 26 ga
PROFILE HEIGHT:	40 mm / 1.57 in
MINIMUM ROOF SLOPE:	0.75:12
CORE MATERIAL:	Polyisocyanurate insulation
ENDLAP:	Available with or without endlap
DIRECTION OF LAY:	Available left or right
COATINGS:	Interior: Polyester 25 mu (other coatings on request) Exterior: Colorcoat HPS200 ULTRA® (other coatings on request)
COLOURS:	Colorcoat HPS200 ULTRA®
MINIMUM LENGTH:	2500 mm / 8' - 2"
MAXIMUM LENGTH:	24994 mm / 82' - 0" *special transportation arrangements for longer lengths as required.

¹C.T.C = Center to Center

