




COLD STORAGE WALL PANEL

CSW-44

These insulated metal panels from FALK Panel are specifically developed for use in cold storage, freezer rooms, climate chambers and clean rooms. These panels have a high insulation value, which means that heat or cold is properly retained or blocked. The choice of food safe coating allows this insulated metal panel to meet standard food safety requirements.


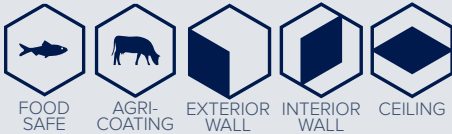


PRODUCT SPECIFICATIONS

CORE THICKNESS	R-VALUE* (h.ft ² .°F/BTU)	U-VALUE (SI)* [W/(m ² .K)]
101.6 mm / 4 in	28.72	0.198
127.0 mm / 5 in	35.90	0.158
152.4 mm / 6 in	43.08	0.132
203.2 mm / 8 in	57.44	0.099

*Tested at 4°C / 40°F mean temperature.

COVER WIDTH:	1115 mm / 43.9 in
CORE MATERIAL:	Polyisocyanurate insulation
ORIENTATION:	Vertical or horizontal
COATINGS:	Polyester 25 MU Note : Specialty coatings available upon request Single side stainless steel available
GAUGE:	Exterior: 24, 26 GA Interior: 26 ga
PROFILING:	External: Macro, Micro or Box profile Internal: Box Profile
COLOURS:	According to our colour charts See: falkpanels.ca/charts
MINIMUM LENGTH:	2500 mm / 8' - 2"
MAXIMUM LENGTH:	16154 mm / 53'-0", longer lengths available* *special transportation arrangements for longer lengths as required.

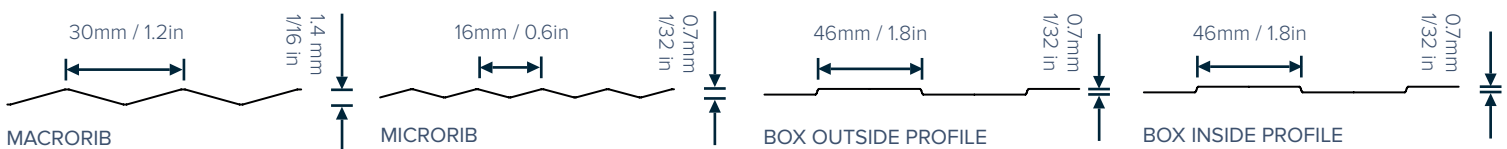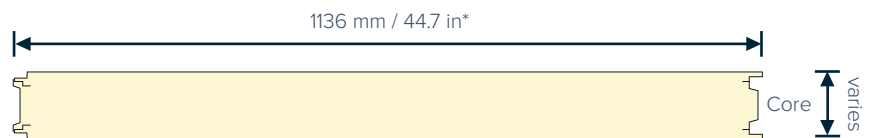

WWW.FALKPANELS.CA